


Specification

Finium Infinite 2




Finium Infinite 2

SKU: FINLIN5535W // FINLIN5535B // FINLIN5535S

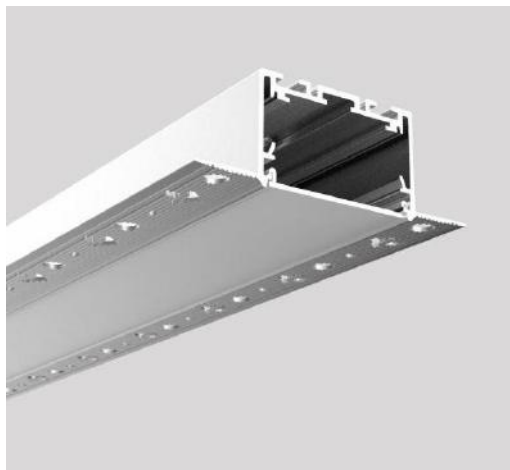


Features

- Free to collocation ordinary PC mask, flexible mask, anti-glare flexible mask, black mask, aluminum mask
- Infinite embedded installation, integrated with architecture
- Leakage proof shield design, perfect details
- AL6063-T5 aluminum profiles with high quality surface treatment and three optional colors of black, white and silver
- Specially equipped with light source design, PC mask, uniform and soft light
- Super free splicing combination: 180 ° direct connection, L type, T type, X type

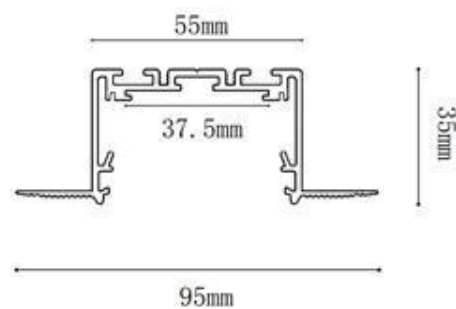

Details

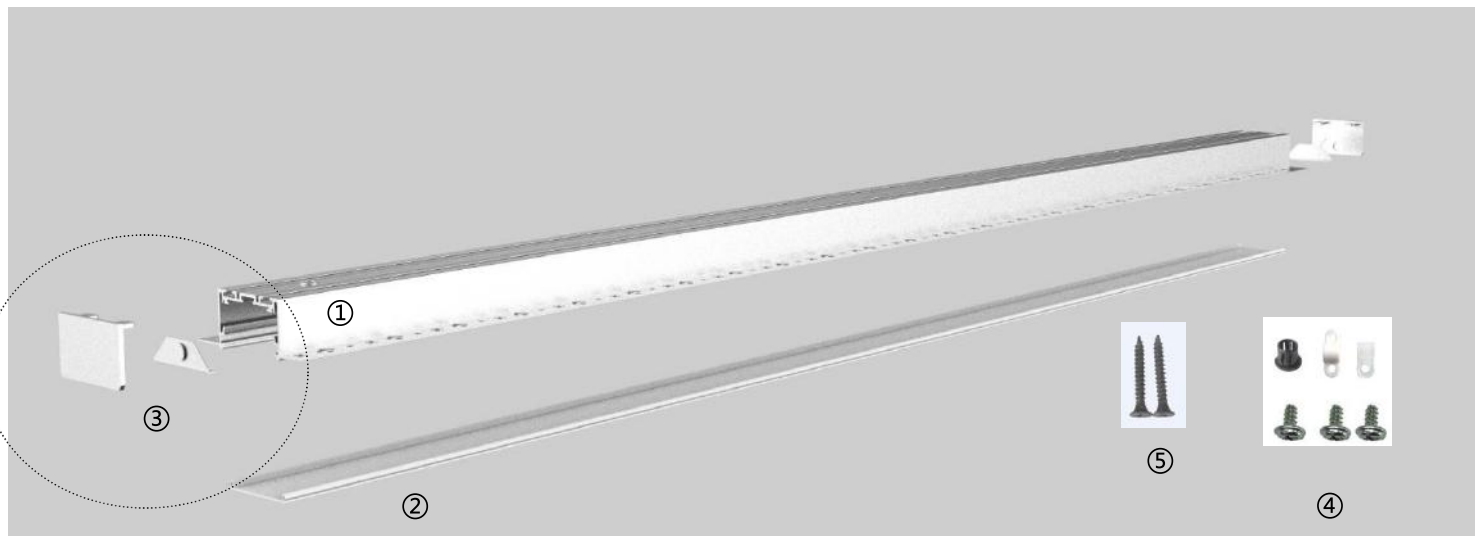




Standard Configuration

Picture	Item	Parameter	Amount	Remarks
	①Profile	Profile weight : 2.52kg/2.5m Size : L2500*W95*H35mm Material : AL6063-T5 Surface processing : Anodizing	1pcs	
	②Cover	Type: Frosted diffuser Material : PC Light transmittance : 86% Size : L2500*W47.5*H10mm	1pcs	
	③End cap	Size : L55*W35*H22mm	2pcs/set	
	④Cable clip		1pcs	
	⑤Install screw	Size : M3.5*30mm	2pcs/set	

Optional Accessories



Picture	Item	Parameter	Amount	Remarks
	⑤Flexible strip D8280-24V-34mm	Voltage : DC24V Typ.power : 25W/M Width : 34mm Min cut : 50mm	2.5M/reel	
	⑤Flexible strip D8560SWW-24V-34mm	Voltage : DC24V Typ.power : 25W/M Width : 34mm Min cut : 50mm ; 2700~6000K tunable white	2.5M/reel	
	⑤Rigid modular DY8280-24V-36mm	Voltage : DC24V Typ.power : 25W/M Width : 36mm Min cut : 50mm	Xpcs/box	
	⑤Rigid modular DY8560SWW-24V-36mm	Voltage : DC24V Typ.power : 25W/M Width : 36mm Min cut : 50mm ; 2700~6000K tunable white	Xpcs/box	
	⑧Power supply	model : BSD-V24-065S Size : 346*29.5*23.5mm	1pcs	
	Splice bar	Size : L50*W9*H22.5	2pcs/set	
	Reflective paper	Size : L15000*W19*H0.188mm	15M/reel	
	T-type (60°+120°)		10pcs/set	
	X-type (60°+120°)		10pcs/set	
	7-type (60°)		10pcs/set	
	L-type (60°)		10pcs/set	
	Y-type (120°)		10pcs/set	
	7-type (120°)		10pcs/set	
	L-type (120°)		10pcs/set	

Picture	Item	Parameter	Amount	Remarks
	②cover	Type: Diffuse flexible mask Material: PC + silica gel Transparency: 86 % Size: L50000*W47.5*H10mm	50M/reel	
		Type: Aluminum mask Material: Aluminum alloy Size: L2500*W47.5*H10mm	1pcs	
		Type: Night mask Material: PMMA Transparency: 15 % Size: L2500*W47.5*H10mm	1pcs	


Optical Parameter

D8280-24V-34mm light source, frosted diffuser

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

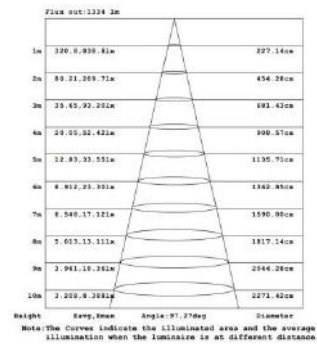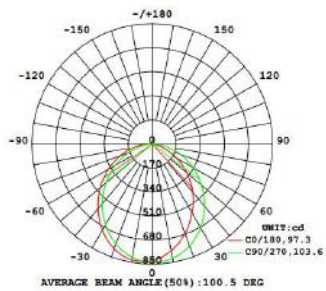

Package

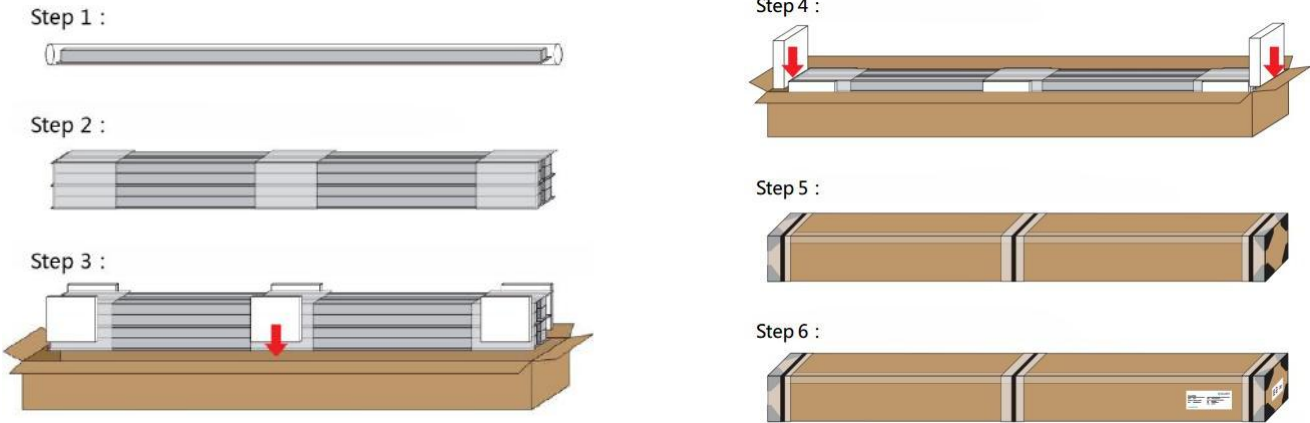

Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
Whole box packaging	Paper box	2580*211*166mm	20.16	23.16	8pcs/box