

tagra[®]

Finium Linear

Luminaire 54x75



UGR

tagra[®]


Finium Linear Luminaire 54x75 UGR

SKU: FINLUMUGR54751210W // FINLUMUGR54751210B // FINLUMUGR54751210S

The Finium Linear Luminaire 54x75 UGR integrates with beautiful structural design, creating optical & thermal design. Constructed from new material and intelligent control this linear can be widely used for indoor general lighting.

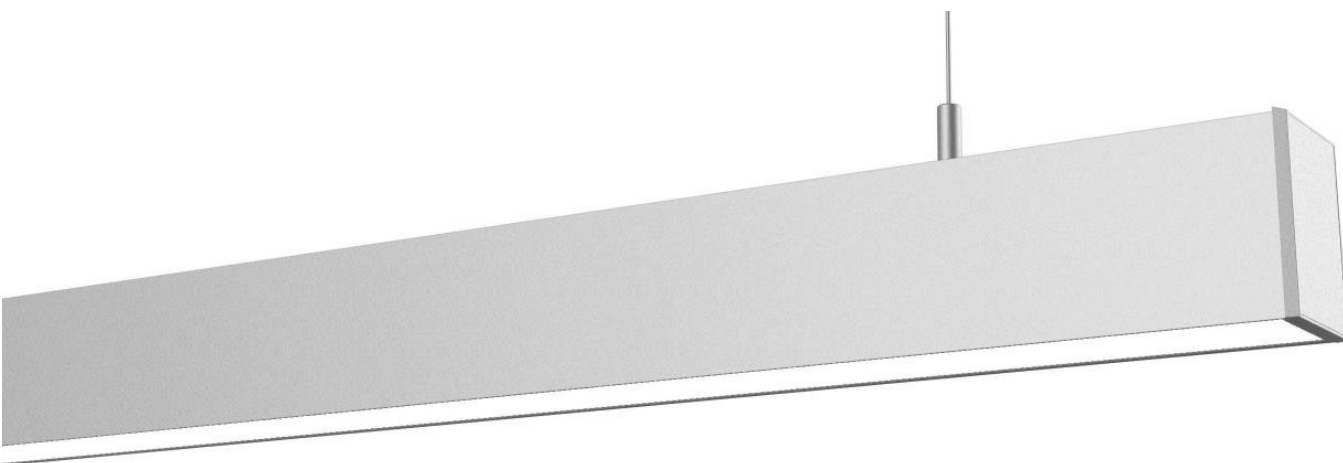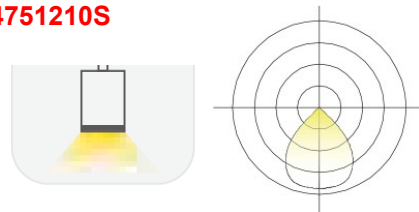

- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Anti-glare design UGR<19
- LM80 certified light source, life >50000H
- Built-in efficient and safe flicker-free dimming power supply

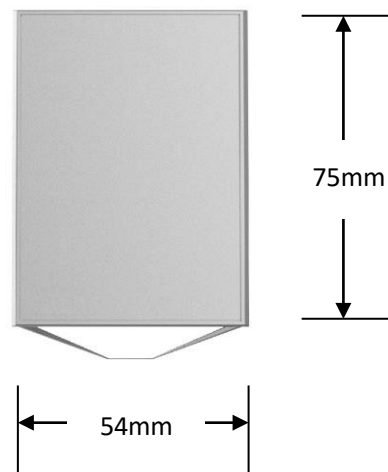

Optical & electronic data :


Model	Size	CCT	Flux (lm)	CRI	Beam angle	Input voltage	Dimming	PF	Power (w)	Efficiency (lm/w)
FINLUMUGR54751210W FINLUMUGR54751210B FINLUMUGR54751210S	1210mm	3000K	2375LM	>80	85°	100-277VAC 50Hz/60Hz	0-10V	>0.9	26W	96
		4000K	2500LM							91
FINLUMUGR54751810W FINLUMUGR54751810B FINLUMUGR54751810S	1810mm	3000K	3500LM	>80	85°	100-277VAC 50Hz/60Hz	0-10V	>0.9	38W	87
		4000K	3325LM							92
FINLUMUGR54752410W FINLUMUGR54752410B FINLUMUGR54752410S	2410mm	3000K	4750LM	>80	85°	100-277VAC 50Hz/60Hz	0-10V	>0.9	56W	85
		4000K	5000LM							89

Remark :


- 1、 the output data is based on the testing result of 1.2m luminaires
- 2、 the tolerance of output data can be vary up to 10% ;
- 3、 the output data is typical value;

1.2 m luminaire with diffuser

AAI Figure

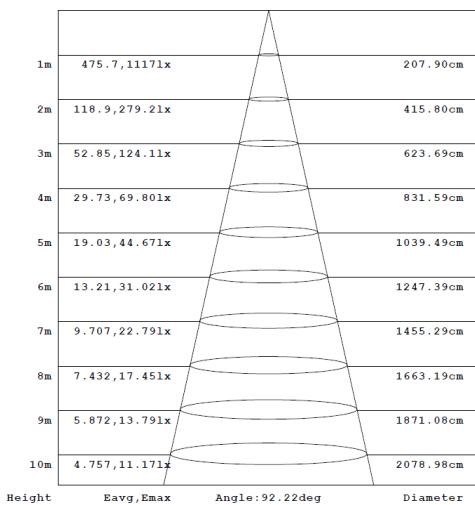


Luminous intensity distribution diagram

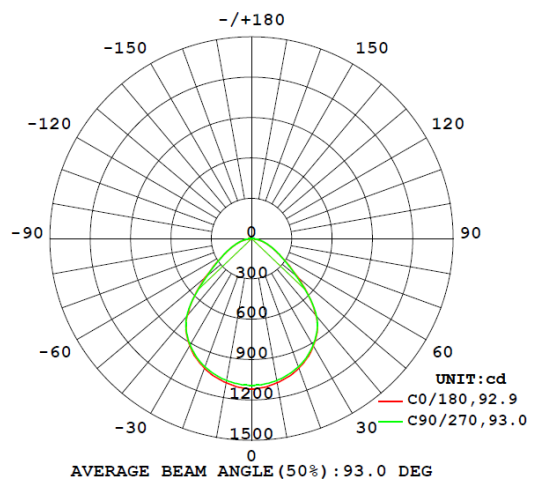


Packing :

◆ The whole package


Package the luminaire into the PE bag

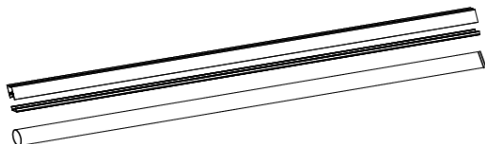


Place the top cover of the hat box on the bottom cover

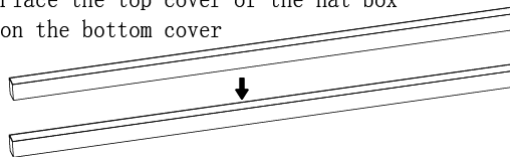

Using the black wrapping tapes to bundle products together according to the different requirements



Tag the label on the hat box



Model	Type	Dimensions (individual package)	Pcs /bundle	NW (Kg)	GW (Kg)	Dimensions (whole package)	CBM (m ³)
FINLUMUGR54751210W FINLUMUGR54751210B FINLUMUGR54751210S	box	1282*108*79	6	NA	NA	1282*216*237	0.066
FINLUMUGR54751810W FINLUMUGR54751810B FINLUMUGR54751810S		1882*108*79	6	NA	NA	1882*216*237	0.10
FINLUMUGR54752410W FINLUMUGR54752410B FINLUMUGR54752410S		2482*108*79	6	NA	NA	2482*216*237	0.13

Ordering code:

Category	Installation	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type	Package	Label Type
General Lighting System	Pendant	50 Series	Dual Color	Prismatic	Flat	Silver	Standard End Cap	1200mm	-Constant Current Rigid	26W	3000K	CRI >80	0-10V	COLORS	COLORS
GLS*	-LS	50	D	P	F	S	S	1200	-T	26	WW	8	B	-C	C
White						1800mm		38W		4000K	Customized				
W						1800		38		NW	S				
GLS(U)**						Black		2400mm		56W					
B						2400		56							
GLS	-LS	50	D	P	F	S	S	1200	-T	26	WW	8	B	-C	C

Remark :

- 1、GLS * : Standard version
- 2、GLS (U)** : UL version

Attentions :

- ◆ Please install the product in the right environment as much as possible ;
- ◆ Please be careful during operation. Do not touch the AC power supply in case of electric shock ;
- ◆ Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit ;
- ◆ This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a counter measures to avoid the damage of the static electricity and surge when using the product.