



Specification

Finium Double Sided




Finium Double Sided

SKU: FINLINDBLE12843W // FINLINDBLE12843B // FINLINDBLE12843B




Features



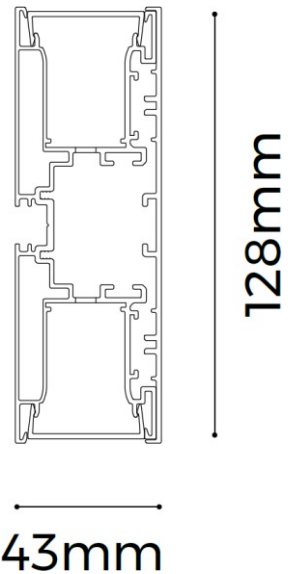

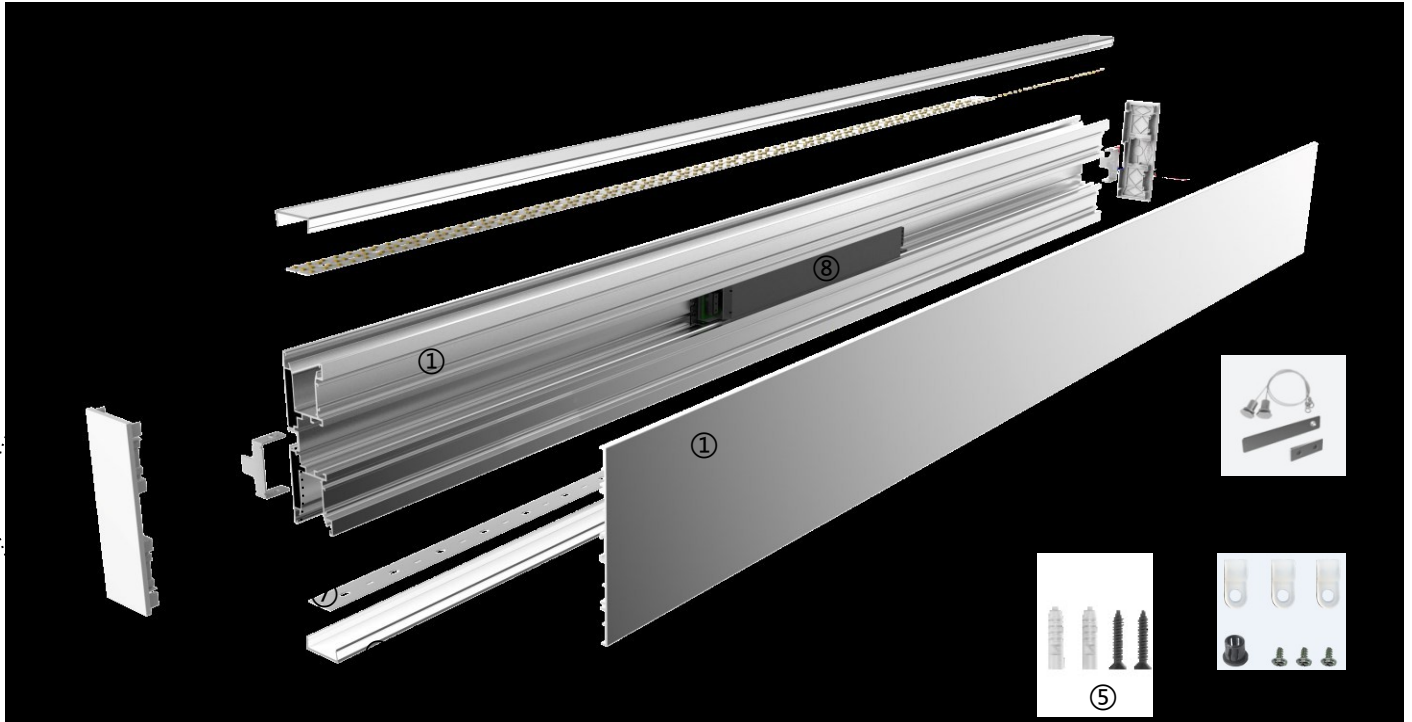

- Wall-mounted, double-sided, directional up and down light, flexibly fit in different lighting applications
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Specially designed light source with PC diffusers producing homogenous & soft lighting
- Super free connection: 180 ° extender, "L-" type light corner
- Linear power supply perfectly built into the luminaires design







Details



Standard Configuration

| Picture | Item | Parameter | Amount | Remarks |
|---|------------------------|--|----------|---------|
|  | ①Profile& Cover plate: | Profile weight : 2.37kg/2.5m Size : L2500*W42.9*H128mm Material : AL6063-T5 Surface processing: Anodizing | 1pcs | |
|  | ②Cover | Type: Frosted diffuser Material: PC Light transmittance : 86% Size : L2500*W34.2*H10.2mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°C. | 1pcs | |
|  | ③End cap | Size : L128*W43*H11.5mm | 2pcs/set | |
|  | ④Safety line | | | |
|  | ⑤Screw set | M3.5*40mm | 3pcs/set | |
|  | ⑥Cable clip | | 1set | |

Optional Accessories

| Picture | Item | Parameter | Amount | Remarks |
|---|-----------------------------------|---|-----------|---------|
|  | ⑤Flexible strip D8280-24V-20mm | Voltage : DC24V Typ.power : 20W/M Width : 20mm Min cut : 50mm | 2.5M/reel | |
|  | ⑤Rigid modular DY8280-24V-23mm | Voltage : DC24V Typ.power : 20W/M Width : 23mm Min cut : 50mm | Xpcs/box | |
|  | Power supply | model : BSD-V24-065S Size : 346*29.5*23.5mm | 1pcs | |
|  | Splice bar | Size : L50*W10*H15mm | 2pcs/set | |

Corners

L-type inner corner




L150*W150*H128mm

L-type exterior corner



L151.6*W151.6*H128mm

180° extender


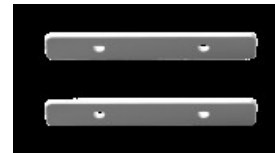


SPCC
silver
L55*W10*H2mm

*The corners can be provided with or without light source.



Optical Parameter

D8280-24V-20mm light source, frosted diffuser

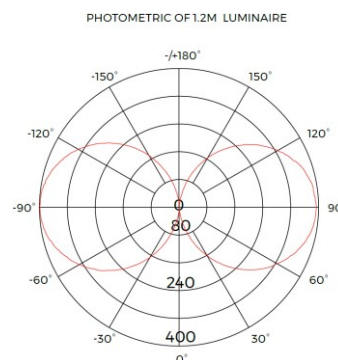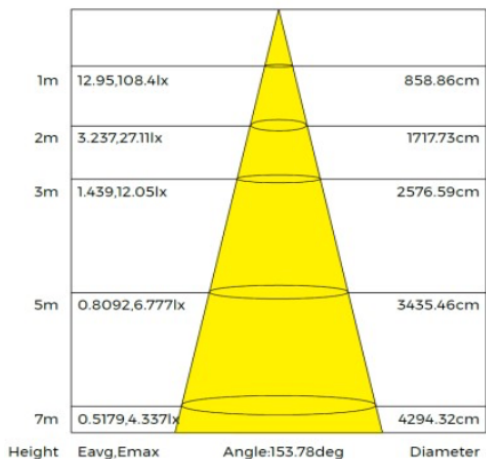

Package

Mode 1:

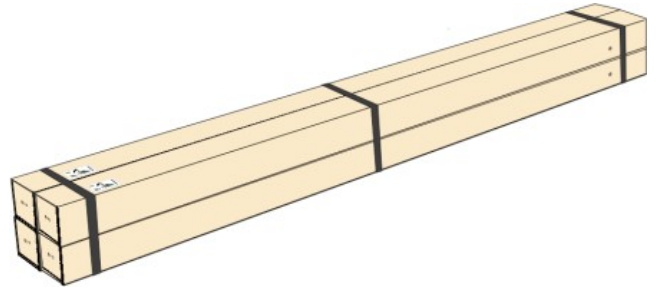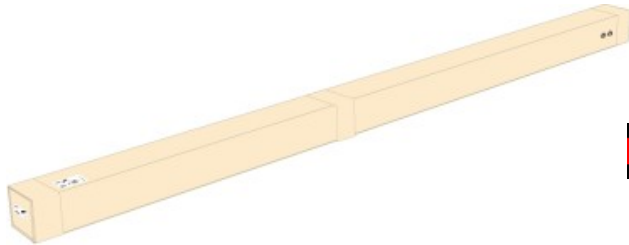


Mode 2:


Step 1 :




Step 2 :



Step 3 :

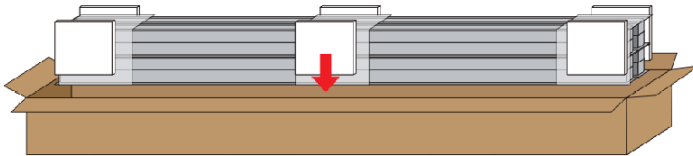

Step 4 :

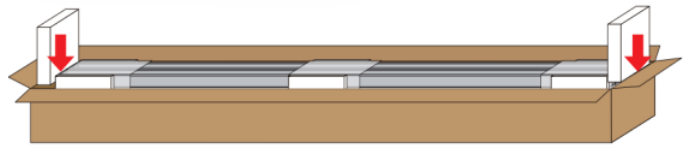

Step 5 :



Step 6 :



| Components | Packaging material | Size(mm) | NW(kg) | GW(kg) | Content |
|---------------------|--------------------|----------------|--------|--------|----------|
| Single piece | Hat box | 2580*148*53mm | 6.93 | 10.53 | 1pcs/box |
| Whole bundle | Hat box | 2580*148*159mm | 20.8 | 31.6 | 3pcs/box |
| Whole box packaging | Paper box | 2580*170*133mm | 27.5 | 30.5 | 8pcs/box |